
	Instructions for use	Date	10.2009
	Track Mats 65.41.06	Version	1.0

In addition to the Track Mat, each sales unit includes sufficient rope in order to securely fix it to the rail chairs.

6 x 4,20 m for fixing the mat transversely and 6 x 0,5 m for connecting the mat modules.

Lay the mat with the **BLACK SIDE FACING UPWARDS** as follows:

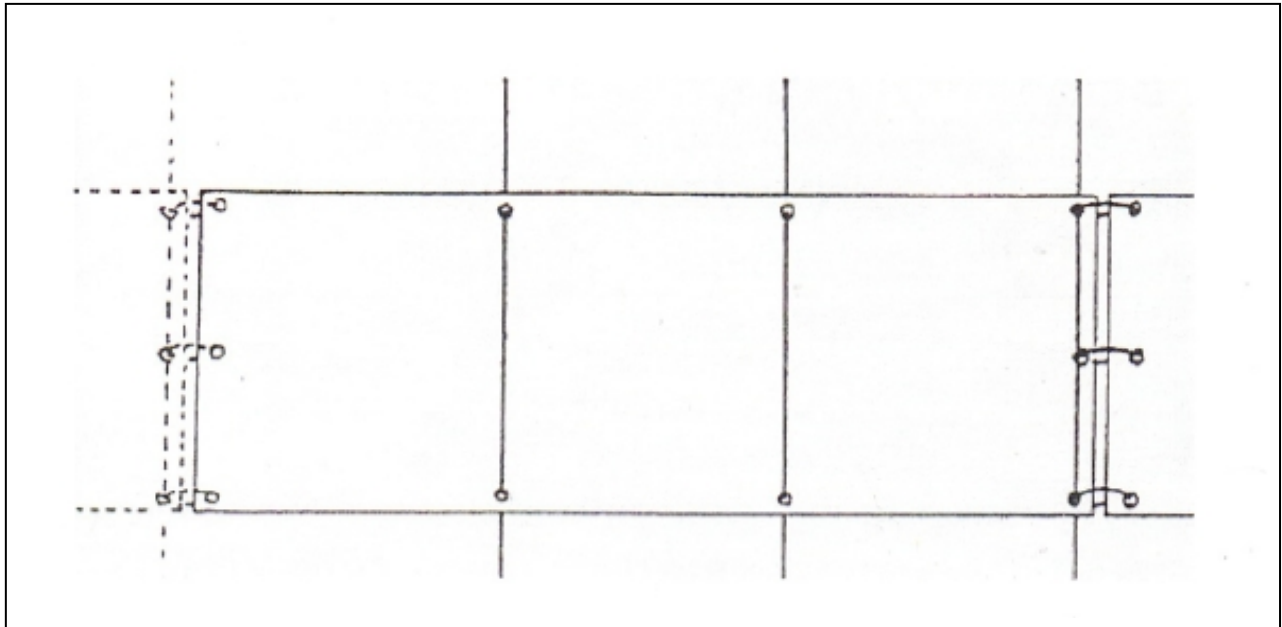

The cross ropes should lie centrally above the mat, as shown in the drawing, and pass under the mat at the sides after having been threaded through the eyelets. The edge of the mat should be snugly tucked against the track.

Pull the cross ropes fast and wrap the ends around the rail chairs. Care must be taken to ensure that the ropes are pulled taut throughout. Avoid applying strain on the mat. The ends of the mat should butt together or overlap just slightly.

Securing the mats in this way prevents them from bellying out in case of wind or rail traffic.

Alternatively – If connecting the ropes transversely represents a tripping hazard, you can also cut them shorter and fasten them to the rail chairs only by means of a loop running through the eyelets.